
AZ-480E SPECIFICATIONS

**World Leader in Portable Reclaimers/Stabilizers** 



## 4' Cutting Width Loader/Backhoe-Mounted Reclaimer/Stabilizer

The ALL NEW AZ-480E (Tier 4 Final) harnesses the power and productivity of much larger self-propelled reclaimers into a very powerful, versatile and affordable loader attachment, with innovative upgrades and improvements throughout. Powered by either a Volvo or Cummins turbo diesel or Ford gasoline engine, the AZ-480E will pulverize up to 12-inch thick asphalt in a single pass. Street patches, full road repairs, base stabilization and opening utility trenches in asphalt are just a few of its many uses.

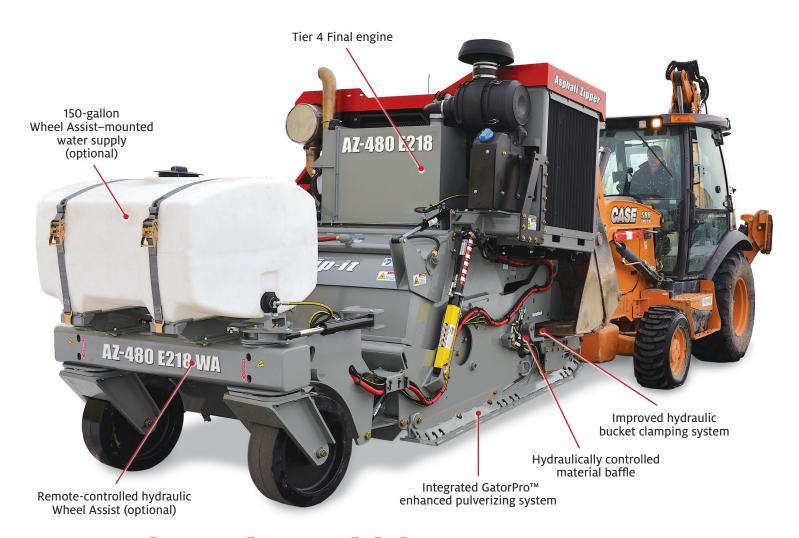

## **Specifications**

Engine Options	Volvo 218 hp Turbo-Diesel	Cummins <b>260 hp</b> Turbo-Diesel	Ford <b>180 hp</b> Gasoline	Planetary	Magnum-duty Fairfield planetary
Torque	670 ft·lb 908 nm	730 ft·lb 987 nm	320 ft·lb 433 nm	Transport	Tows behind 2-ton pickup on tandem-axle trailer (included)
Cutting Speed	9523ft²/hr 890 m²/hr	12000 ft²/hr 1114m²/hr	7200 ft²/hr 668 m²/hr	Mounting	Mounts on most loader buckets
Weight	12,000 lbs 5443 kg	12,200 lbs 5533 kg	10,300 lbs 4672 kg	Cutting Teeth	Bullet-head, carbide-tipped
Cutting Width		48 in 1219 mm		Depth Control	Hydraulic
Cutting Depth		0 to 12 in 0 to 304 mm		Additional Features	Top-opening bit hatch Hydraulic bucket clamping system

